


SAE standard för Svänghjulskåpor (eng. flywheel housing)



| SAE No. | A (Pilot dia) | | B (Bolt circle dia) | | C (Housing outer dia) | | Screw holes no. | Screw size |
|---------|------------------|--------|------------------------|--------|--------------------------|-------|--------------------|---------------|
| | mm | in | mm | in | mm | in | | |
| 6 | 266,70 | 10,500 | 285,75 | 11,250 | 307,8 | 12,12 | 8 | M10 |
| 5 | 314,32 | 12,375 | 333,38 | 13,125 | 355,6 | 14,00 | 8 | M10 |
| 4 | 361,95 | 14,250 | 381,00 | 15,000 | 403,4 | 15,88 | 12 | M10 |
| 3 | 409,58 | 16,125 | 428,62 | 16,875 | 450,8 | 17,75 | 12 | M10 |
| 2 | 447,68 | 17,625 | 466,72 | 18,375 | 489,0 | 19,25 | 12 | M10 |
| 1 | 511,18 | 20,125 | 530,22 | 20,875 | 552,4 | 21,75 | 12 | M10 |
| 1/2 | 584,20 | 23,000 | 619,12 | 24,375 | 647,7 | 25,50 | 12 | M12 |
| 0 | 647,70 | 25,500 | 679,45 | 26,750 | 711,2 | 28,00 | 16 | M12 |
| 00 | 784,40 | 31,000 | 850,90 | 33,500 | 882,6 | 34,75 | 16 | M12 |

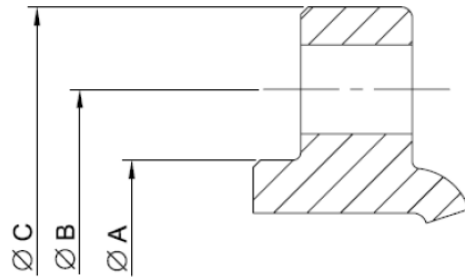